

FORM PTO-1390
R9REV 5-93

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C.371**

JP 6-131165

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

08/945705

INTERNATIONAL APPLICATION NO.
US95/06620

INTERNATIONAL FILING DATE
24 May 1995

PRIORITY DATE CLAIMED

TITLE OF INVENTION

LUBRICATING OIL COMPOSITION

APPLICANT(S) FOR DO/EO/US

EXXON RESEARCH AND ENGINEERING COMPANY

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(I).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau)
 - b. ☒ has been transmitted by the International Bureau
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CVFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:

"Express Mail" mailing label

number EI 775965997US

Date of Deposit 10/29/97

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D. C. 20231.

Lina Allouca

(Typed or printed name of person mailing paper or fee)

Lina Allouca
(Signature of person mailing paper or fee)

US

Annex US.II, page 2 PCT Applicant's Guide - Volume II - National Chapter - US

U.S. APPLICATION NO (if known, see 37 CFR 1.5)		INTERNATIONAL APPLICATION NO US95/06620		ATTORNEY'S DOCKET NUMBER JP 6-131165																																															
17. The following fees are submitted: Basic National Fee (37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO \$930.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) \$720.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$790.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1070.00 International preliminary examination fee paid to USPTO (37 CFR .482) and all claims satisfied provisions of PCT Article 33(2)-(4)..... \$98.00 ENTER APPROPRIATE BASIC FEE AMOUNT = \$ 720.00 Surcharge of \$130.00 for furnishing the oath or declaration later than _____ 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)). \$ 130.00 <table border="1" style="width:100%"><thead><tr><th>Claims</th><th>Number Filed</th><th>Number Extra</th><th>Rate</th></tr></thead><tbody><tr><td>Total Claims</td><td>8 - 20 =</td><td>0</td><td>x \$22.00</td></tr><tr><td>Independent Claims</td><td>2 - 3 =</td><td>0</td><td>x \$82.00</td></tr><tr><td colspan="3">Multiple dependent claim(s) (if applicable)</td><td>+\$270.00</td></tr><tr><td colspan="3">TOTAL OF ABOVE CALCULATIONS =</td><td>\$ 1120.00</td></tr><tr><td colspan="3">Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28)</td><td>\$ -</td></tr><tr><td colspan="3">SUBTOTAL =</td><td>\$ 1120.00</td></tr><tr><td colspan="3">Processing fee of \$130.00 for furnishing the English translation later than _____ 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</td><td>\$ 0</td></tr><tr><td colspan="3">TOTAL NATIONAL FEE =</td><td>\$ 1120.00</td></tr><tr><td colspan="3">Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +</td><td>\$</td></tr><tr><td colspan="3">TOTAL FEE ENCLOSED =</td><td>\$ 1120.00</td></tr><tr><td colspan="3"></td><td>Amount to be: refunded \$ charged \$1120.00</td></tr></tbody></table> <p>a. <input type="checkbox"/> A check in the amount of \$ _____ to cover the above fees is enclosed.</p> <p>b. <input checked="" type="checkbox"/> Please charge my Deposit Account No. <u>05-1330</u> in the amount of \$ <u>1120.00</u> to cover the above fees. A duplicate copy of this sheet is enclosed</p> <p>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>05-1330</u>. A duplicate copy of this sheet is enclosed.</p> <p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</p> <p>SEND ALL CORRESPONDENCE TO:</p> <p>EXXON RESEARCH AND ENGINEERING COMPANY P.O. Box 390 Florham Park, NJ 07932-0390</p> <p style="text-align: right;">SIGNATURE <u>Joseph J. Allocca</u> NAME <u>Joseph J. Allocca</u></p> <p style="text-align: right;">REGISTRATION NUMBER <u>27,766</u></p>				Claims	Number Filed	Number Extra	Rate	Total Claims	8 - 20 =	0	x \$22.00	Independent Claims	2 - 3 =	0	x \$82.00	Multiple dependent claim(s) (if applicable)			+\$270.00	TOTAL OF ABOVE CALCULATIONS =			\$ 1120.00	Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28)			\$ -	SUBTOTAL =			\$ 1120.00	Processing fee of \$130.00 for furnishing the English translation later than _____ 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).			\$ 0	TOTAL NATIONAL FEE =			\$ 1120.00	Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +			\$	TOTAL FEE ENCLOSED =			\$ 1120.00				Amount to be: refunded \$ charged \$1120.00
				Claims	Number Filed	Number Extra	Rate																																												
Total Claims	8 - 20 =	0	x \$22.00																																																
Independent Claims	2 - 3 =	0	x \$82.00																																																
Multiple dependent claim(s) (if applicable)			+\$270.00																																																
TOTAL OF ABOVE CALCULATIONS =			\$ 1120.00																																																
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28)			\$ -																																																
SUBTOTAL =			\$ 1120.00																																																
Processing fee of \$130.00 for furnishing the English translation later than _____ 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).			\$ 0																																																
TOTAL NATIONAL FEE =			\$ 1120.00																																																
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +			\$																																																
TOTAL FEE ENCLOSED =			\$ 1120.00																																																
			Amount to be: refunded \$ charged \$1120.00																																																

29 OCT 1997
08/945705

- 1 -

LUBRICATING OIL COMPOSITION

BACKGROUND OF THE INVENTION

The present invention relates to a novel lubricating oil composition. More specifically, the present invention relates to a lubricating oil composition having excellent antiwear properties and friction-reducing properties, capable of maintaining the friction-reducing properties, for a prolonged period of time, useful as a lubricating oil for internal-combustion engines, automatic transmission gearboxes, dampers, power steering units and the like, particularly useful as a lubricating oil for internal-combustion engines.

DISCUSSION OF THE RELATED OIL

Lubricating oils have been used for internal-combustion engines, and for driving units and gears such as automatic transmission gearboxes, dampers and power steerings in order to smoothly operate them. In particular, lubricating oils for internal-combustion engines not only lubricate various sliding portions, but also cool the inside of the engines, clean and disperse those products which are produced by combustion, and furthermore prevent the rusting and corrosion of the engines.

In order to meet this requirement, various additives such as an antiwear agent, a metallic detergent, a nonash dispersant and an antioxidant are incorporated into the lubricating oils for internal-combustion engines.

It is particularly important that the lubricating oils ensure the smooth operation of the engines under all operating conditions to prevent the wear and seizure of the engines. The lubricated parts of the engines are, in most cases, under the fluid lubrication condition. However, valve-trains and the top and bottom dead centers of a piston tend to be under the boundary lubrication condition. Antiwear properties under the boundary lubrication condition are generally imparted by the addition of zinc dithiophosphate or zinc dithiocarbamate.

- 2 -

In order to reduce energy lost to friction and to increase fuel economy, a friction modifier is added to lubricating oils. For example, an extreme pressure agent such as a molybdenum compound or a phosphoric ester, or a compound which is an oily agent such as a fatty ester or an alkylamine has been generally used as the friction modifier.

However, while lubricating oil containing such a friction modifier shows the effect of the friction modifier at the outset of the use thereof, it loses the effect when it undergoes oxidative degradation. Namely, the friction-reducing effect of the friction modifier is greatly affected by additives other than the friction modifier, so that it has been difficult for the lubricating oil to maintain, for a long period of time, friction-reducing properties which are shown at the beginning of the operation of an engine.

The present invention has accomplished the objective of developing a lubricating oil (engine oil) which can maintain the effect of reducing friction in engines for a long period of time under these circumstances.

SUMMARY OF THE INVENTION

It has been discovered that a lubricating oil composition having the above described properties is obtained by blending, sulfoxymolybdenum dithiocarbamate having a specific alkyl group, zinc dialkyldithiophosphate having a specific alkyl group, zinc dialkyldithiophosphate having a specific alkyl group, specific alkylsalicylate(s), and, if desired, succinimide containing boron, each in a predetermined amount intra lubricating oil base stock. The present invention has been accomplished on the basis of the above finding.

Namely, the present invention relates to the following lubricating oil compositions:

(1) a lubricating oil composition characterized by comprising a lubricating base oil and additives consisting essentially of:

(a) sulfoxymolybdenum dithiocarbamate containing a hydrocarbon group having 8 to 18 carbon atoms,

- 3 -

(b) zinc dialkyldithiophosphate selected from the group consisting of zinc dialkyldithiophosphate containing a primary alkyl group having 1 to 18 carbon atoms, and a mixture of zinc dialkyldithiophosphate containing a primary alkyl group having 1 to 18 carbon atoms and zinc dialkyldithiophosphate containing a secondary alkyl group having 1 to 18 carbon atoms, and

(c) a mixture of 100 to 50% by weight of calcium alkylsalicylate and 0 to 50% by weight of magnesium alkylsalicylate,

the amount of molybdenum derived from the sulfoxymolybdenum dithiocarbamate being from 200 to 1000 ppm (weight basis) of the total weight of the composition,

the amount of phosphorus derived from the zinc dialkyldithiophosphate being from 0.04 to 0.15% by weight of the total weight of the composition, and

the total amount of the calcium alkylsalicylate and the magnesium alkylsalicylate being from 1 to 10% by weight of the total weight of the composition; and

(2) a lubricating oil composition characterized by comprising a lubricating base oil and additives consisting essentially of:

(a) sulfoxymolybdenum dithiocarbamate containing a hydrocarbon group having 8 to 18 carbon atoms,

(b) zinc dialkyldithiophosphate selected from the group consisting of zinc dialkyldithiophosphate containing a primary alkyl group having 1 to 18 carbon atoms, and a mixture of zinc dialkyldithiophosphate containing a primary alkyl group having 1 to 18 carbon atoms and zinc dialkyldithiophosphate containing a secondary alkyl group having 1 to 18 carbon atoms,

(c) a mixture of 100 to 50% by weight of calcium alkylsalicylate and 0 to 50% by weight of magnesium alkylsalicylate, and

- 4 -

(d) succinimide containing boron,

the amount of molybdenum derived from the sulfoxymolybdenum dithiocarbamate being from 200 to 1000 ppm (weight basis) of the total weight of the composition,

the amount of phosphorus derived from the zinc dialkyldithiophosphate being from 0.04 to 0.15% by weight of the total weight of the composition,

the total amount of the calcium alkylsalicylate and the magnesium alkylsalicylate being from 1 to 10% by weight of the total weight of the composition, and

the amount of boron derived from the succinimide containing boron being from 0.005 to 0.06% by weight of the total weight of the composition.

DETAILED DESCRIPTION OF THE INVENTION

There is no particular limitation on the lubricating base stock oil which is used in the lubricating oil composition of the present invention, and any base oil, such as mineral oil or synthetic oil, which is commonly used for the conventional lubricating basic oils can be used.


Examples of the mineral oil include raffinates which can be obtained by subjecting raw materials for lubricating oils to solvent refining, using an aromatic extraction solvent such as phenol or furfural, hydrogenated oils which can be obtained by subjecting raw materials for lubricating oils to hydrogenation treatment, using a hydrogenation catalyst such as cobalt or molybdenum with a silica-alumina carrier, and lubricating oil fractions which can be obtained by the isomerization of waxes. Suitable base stocks include 60 neutral oil, 100 neutral oil, 150 neutral oil, 300 neutral oil, 500 neutral oil and bright stocks.

- 5 -

Examples of the synthetic oil include poly alpha-olefin oligomers, polybutenes, alkylbenzenes, polyol esters, polyglycol esters, dibasic esters, phosphoric esters and silicone oils. These base oils belonging to mineral oil or synthetic oil can be used either singly or in combination of two or more. Further, a mixture of mineral oil and synthetic oil can also be used.

Those oils which have a viscosity at 100°C of 3 to 20 cSt are preferable as the base oils for use in the lubricating oil composition of the present invention. Of these, hydrocracked oils and wax-isomerized oils which contain 3% by weight or less of aromatics, 50 ppm or less of sulfur and 50 ppm or less of nitrogen are particularly preferred.

As the sulfoxymolybdenum dithiocarbamate to be incorporated into the lubricant oil composition in accordance with the present invention, use may be made of a compound having the following formula [1]:



wherein R¹ and R², are independently a hydrocarbon group with 8 to 18 carbon atoms and may or may not be the same, m and n are a positive integer provided that m + n = 4.


Examples of the hydrocarbon group having 8 to 18 carbon atoms, represented by R¹ and R² in the general formula [I] include hydrocarbon groups such as an alkyl group having 8 to 18 carbon atoms, an alkenyl group having 8 to 18 carbon atoms, a cycloalkyl group having 8 to 18 carbon atoms, an aryl group having 8 to 18 carbon atoms, an alkylaryl group and an arylalkyl group. The above alkyl and alkenyl groups may be linear or branched. In the lubricating oil composition of the present invention, it is particularly preferable that the hydrocarbon group represented by R¹ and R² have 8 carbon atoms.

Specific examples of the hydrocarbon group represented by R¹ and R² include octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, octenyl, noneyl,

decenyl, undecenyl, dodecenyl, tridecenyl, tetradecenyl, hexadecenyl, octadecenyl, dimethylcyclohexyl, ethylcyclohexyl, methylcyclohexylmethyl, cyclohexylethyl, propylcyclohexyl, butylcyclohexyl, heptylcyclohexyl, dimethylphenyl, methylbenzyl, phenethyl, naphthyl and dimethylnaphthyl groups.

In the lubricating oil composition of the present invention, either one or two or more sulfoxymolybdenum dithiocarbamates can be used. Further, the sulfoxymolybdenum dithiocarbamate is incorporated into the composition so that the amount of molybdenum derived from the sulfoxymolybdenum dithiocarbamate can be from 200 to 1000 ppm (weight basis), preferably from 300 to 800 ppm (weight basis) of the total weight of the composition. When the sulfoxymolybdenum dithiocarbamate is incorporated in such an amount that the amount of molybdenum derived from the sulfoxymolybdenum dithiocarbamate is less than 200 ppm (weight basis) of the total weight of the composition, the effect of improving friction-reducing properties cannot be sufficiently obtained. On the other hand, when the sulfoxymolybdenum dithiocarbamate is incorporated in such an amount that the amount of molybdenum derived from the sulfoxymolybdenum dithiocarbamate is in excess of 1000 ppm (weight basis) of the total weight of the composition, the effect which is expected from such an amount of the sulfoxymolybdenum dithiocarbamate cannot be obtained, and sludge or the like tends to be brought about.

As the zinc dialkyldithiophosphate to be incorporated into the lubricant oil composition in accordance with the present invention, use may be made of a compound having the following formula [2]:



wherein R³ and R⁴ are independently a primary and secondary alkyl group with 1 to 18, preferably 3 to 18 carbon atoms and may or may not be the same.


In the lubricating oil composition of the present invention, any of the following ones can be used as the zinc dialkyldithiophosphate: zinc dialkyldithiophosphate represented by the general formula [2] in which all of the alkyl

groups are primary; a mixture of zinc dialkyldithiophosphate in which all of the alkyl groups are primary and zinc dialkyldithiophosphate in which all of the alkyl groups is primary and the other alkyl group is secondary; zinc dialkyldithiophosphate in which one of the alkyl groups are secondary; and a mixture thereof.

The primary and secondary alkyl groups represented by R^3 and R^4 in the general formula [2] are propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl and dodecyl groups. However, zinc dialkyldithiophosphate containing a primary or secondary alkyl group having 3 to 12 carbon atoms is preferably used in the lubricating oil composition of the present invention.

In the lubricating oil composition of the present invention, the zinc dialkyldithiophosphate is incorporated so that the amount of phosphorus derived from the zinc dialkyldithiophosphate can be from 0.04 to 0.15% by weight, preferably from 0.06 to 0.12% by weight of the total weight of the composition. When the zinc dialkyldithiophosphate is incorporated into the composition in such an amount that the amount of phosphorus derived from the zinc dialkyldithiophosphate is less than 0.04% by weight of the total weight of the composition, the resulting composition is poor in antiwear properties, in addition, cannot have a satisfactorily low coefficient of friction under the operating conditions of high oil temperatures and low rotational speeds. On the other hand, when the zinc dialkyldithiophosphate is incorporated in such an amount that the amount of phosphorus derived from the zinc dialkyldithiophosphate is in excess of 0.15% by weight of the total weight of the composition, the effect which is expected from such an amount of the zinc dialkyldithiophosphate cannot be obtained.

As the calcium or magnesium alkylsalicylate to be used in the lubricant oil composition in accordance with the present invention, use may be made of a compound having the following formula [3]:

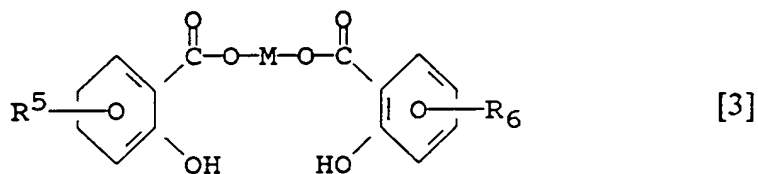

wherein M is calcium or magnesium, and R⁵ and R⁶ are independently alkyl group with 8 to 30 carbon atoms and may or may not be the same.

The alkyl group having 8 to 30 carbon atoms represented by R⁵ and R⁶ in the general formula [3] may be linear, branched or cyclic one. Examples of such an alkyl group include octyl, nonyl, decyl, dodecyl, pentadecyl, octadecyl, eicosyl, docosyl, tricosyl, hexacosyl, triacontyl, dimethylcyclohexyl, ethylcyclohexyl, methylcyclohexylmethyl and cyclohexylethyl groups.

In the lubricating oil composition of the present invention, the alkylsalicylate is incorporated as a mixture of 100 to 50% by weight of calcium alkylsalicylate and 0 to 50% by weight of magnesium alkylsalicylate. The mixture is incorporated in such an amount that the total amount of the calcium alkylsalicylate and the magnesium alkylsalicylate is from 0.5 to 10% by weight, preferably from 1 to 6% by weight of the total weight of the composition. When the total amount of the calcium alkylsalicylate and the magnesium alkylsalicylate is less than 0.5% by weight of the total weight of the composition, cleaning effect cannot be sufficiently obtained. On the other hand, when the total amount of the calcium alkylsalicylate and the magnesium alkylsalicylate is in excess of 10% by weight of the total weight of the composition, the effect which is expected from such an amount of the mixture cannot be obtained, and ash content is rather increased. Such an amount is therefore unfavorable.

In the lubricating oil composition of the present invention, it is preferable to adjust the total base number of the composition to 3 to 10, preferably 4 to 7. The base number of the composition can be determined in accordance with JIS K2501. The total base number of the composition can be adjusted by selecting calcium alkylsalicylate and magnesium alkylsalicylate, each having a proper base number.

Succinimide containing boron can be incorporated into the lubricating oil composition of the present invention, if desired.

The boron/nitrogen ratio regarding the number of the atoms contained in the succinimide containing boron which is used in the lubricating

oil composition of the present invention is from 0.05 to 1.5, preferably from 0.1 to 0.8. When the boron/nitrogen ratio is less than 0.05, the resulting composition cannot have sufficiently-improved friction-reducing properties. On the other hand, when the boron/nitrogen ratio exceeds 1.5, the friction-reducing properties of the resulting composition are impaired.

In the lubricating oil composition of the present invention, the succinimide containing boron is incorporated so that the amount of boron derived from the succinimide containing boron can be from 0.005 to 0.06% by weight, preferably from 0.01 to 0.04% by weight of the total weight of the composition. When the succinimide containing boron is used in such an amount that the amount of boron derived from the succinimide containing boron is less than 0.005% by weight of the total weight of the composition, the resulting composition cannot have sufficiently-improved friction-reducing properties. On the other hand, when the succinimide containing boron is used in such an amount that the amount of boron derived from the succinimide containing boron is in excess of 0.06% by weight of the total weight of the composition, the effect which is expected from such an amount of the succinimide containing boron cannot be obtained.

Various additives which have been usually incorporated into the conventional lubricating oils, such as a metallic detergent, another friction modifier, an antioxidant, a viscosity index improver, a pour point depressant, an anti-foaming agent, other antiwear agent(s), a rust preventive, an ashless dispersant and a corrosion inhibitor, can be added, if necessary, to the lubricating oil composition of the present invention within such a limit that the object of the present invention can be fully attained.

Examples of the metallic detergent include calcium sulfonate, magnesium sulfonate, barium sulfonate, calcium phenate, barium phenate, calcium salicylate and magnesium salicylate. In general, the metallic detergent is used in the composition in an amount of 0.1 to 5% by weight.

Examples of the friction modifier include partial esters of poly-valent alcohols, amines, amides and ester sulfides.

Examples of the antioxidant include amine antioxidants such as alkylated diphenylamines, phenyl-alpha-naphthylamines and alkylated alpha-naphthylamines, and phenolic antioxidants such as 2,6-di-t-butyl-4-methylphenol and 4,4'-methylene-bis(2,6-di-t-butylphenol). In general, such an antioxidant is used in the composition in an amount of 0.05 to 2% by weight.

Examples of the viscosity index improver include those of poly-methacrylate type, polyisobutylene type, ethylene-propylene copolymer type and styrene-butadiene hydrogenated copolymer type. In general, such an improver is used in the composition in an amount of 0.5 to 35% by weight.

Examples of the pour point depressant include polyalkyl-methacrylate, a condensation product of chlorinated paraffin and naphthalene and alkylated polystyrene.

Examples of the anti-foaming agent include dimethyl polysiloxane and polyacrylic acid.

Examples of the antiwear agent include metallic salts of thiophosphoric acid, metallic salts of thiocarbamic acid, sulfur compounds, phosphoric esters and phosphorous esters. In general, this agent is used in the composition in an amount of 0.05 to 5.0% by weight.

Examples of the rust preventive additive include fatty acids, partial esters of alkenyl succinates, fatty acid soaps, alkylsulfonates, fatty polyvalent alcohol esters, fatty amines, paraffin oxides and alkyl polyoxyethylene ethers.

Examples of the ashless dispersant include those of succinimide type, succinamide type, benzylamine type and ester type. In general, such a dispersant is used in the composition in an amount of 0.5 to 7% by weight.

Examples of the corrosion inhibitor include benzotriazole and benzoimidazole.

Examples

The present invention will now be explained more specifically by referring to the following Examples. However, the present invention is not limited by these examples in any way.

The coefficients of friction of the lubricating oil compositions were determined by a reciprocating sliding friction tester [SRV Friction Tester] under the conditions of a frequency of 50 Hz, an amplitude of 3 mm, a load of 25 N, a temperature of 80°C and a test time of 25 minutes.

Examples 1 to 9 and Comparative Examples 1 and 2

The lubricating oil compositions of these examples are those which contain sulfoxymolybdenum dithiocarbamate, zinc dialkyldithiophosphate and alkylsalicylate. Each lubricating oil composition was prepared by blending the components whose type and amount are shown in Table 1 with a base oil (100 neutral oil having a viscosity at 100°C of 4.4 mm/s²). The coefficient of friction of each composition thus obtained was determined right after the composition was prepared, and after the composition was oxidized by being held at 150°C for 72 hours. The results are shown in Table 1.

TABLE I

	Example											Comparative Example	
	1	2	3	4	5	6	7	8	9	1	2		
Amount of Mo in C ₈ -MoDTC (ppm)	400	800	-	400	400	400	400	400	400	400	400		
Amount of Mo in C ₁₃ -MoDTC (ppm)	-	-	800	-	-	-	-	-	-	-	-		
Amount of phosphorus in C ₈ Zn DTP (primary) (wt%)	0.10	0.10	0.10	0.06	0.07	0.05	0.10	0.10	0.10	-	0.10		
Amount of phosphorus in C ₃ /C ₆ Zn DTP (secondary) (wt%)	-	-	-	-	0.03	0.05	-	-	-	0.10	-		
Calcium C ₁₄ /C ₁₆ /C ₁₈ salicylate (wt%)	3.5	3.5	3.5	3.5	3.5	3.5	2.0	2.0	1.5	3.5	-		
Magnesium C ₁₄ /C ₁₆ /C ₁₈ salicylate (wt%)	-	-	-	-	-	-	-	1.0	1.5	-	-		
Calcium - sulfonate (wt%)	-	-	-	-	-	-	-	-	-	-	2.0		
Succinimide containing boron (wt%)	-	-	-	-	-	-	-	-	-	-	-		
Coefficient of friction	0.112	0.108	0.111	0.115	0.111	0.113	0.115	0.111	0.110	0.141	0.116		
	0.113	0.110	0.112	0.116	0.113	0.115	0.115	0.112	0.112	0.190	0.145		

Note) C₈ - MoDTC: sulfoxymolybdenum - N,N-dioctyl-dithiocarbamate
C₁₈ - MoDTC: sulfoxymolybdenum - N,N-ditridecyl-dithiocarbamate
C₈ - ZnDTP (primary): zinc di-2-ethylhexylidithiophosphate
C₃/C₆ ZnDTP (secondary): zinc isopropyl-1-ethyl-1-butylidithiophosphate

When the lubricating oil compositions of Examples 1 to 9 according to the present invention were used for the determination of the coefficient of friction thereof, it was found that all of the compositions had a low coefficient of friction and excellent friction-reducing properties. Moreover, almost no change was found in the coefficient of friction even after the compositions were heated at 150°C for 72 hours and oxidized. Therefore, it can be understood that the lubricating oil compositions of the invention are excellent in heat resistance. In contrast, in the case of the lubricating oil composition of Comparative Example 1, which was prepared by using only zinc dialkyldithiophosphate having a secondary alkyl group as the zinc dialkyldithiophosphate, the coefficient of friction determined right after the composition was prepared was already high. Moreover, the coefficient of friction became higher after the composition was heated at 150°C for 72 hours and oxidized. It can thus be seen that this comparative composition is poor in both friction-reducing properties and heat resistance. In the case of the lubricating oil composition of Comparative Example 2, which was prepared by using calcium sulfonate instead of alkyl-salicylate, the coefficient of friction became higher after the composition was heated at 150°C for 72 hours and oxidized. It can thus be known that this comparative composition is poor in heat resistance.

Examples 10 to 18 and Comparative Examples 3 and 4

The lubricating oil compositions of these examples are those which contain sulfoxymolybdenum dithiocarbamate, zinc dialkyldithiophosphate, alkyl-salicylate and succinimide containing boron. Each lubricating oil composition was prepared by blending the components whose type and amount are shown in Table 2 with a base oil (100 neutral oil having a viscosity at 100°C of 4.4 mm/s²). The coefficient of friction of each composition thus obtained was determined right after the composition was prepared, and after the composition was oxidized by being held at 150°C for 72 hours. The results are shown in Table 2.

TABLE 2

	Example											Comparative Example			
	10	11	12	13	14	15	16	17	18	3	4				
Amount of Mo in C ₈ -MoDTC (ppm)	400	800	-	400	400	400	400	400	400	400	400				
Amount of Mo in C ₁₃ -MoDTC (ppm)	-	-	800	-	-	-	-	-	-	-	-				
Amount of phosphorus in C ₈ Zn DTP (primary) (wt%)	0.10	0.10	0.10	0.06	0.07	0.05	0.10	0.10	0.10	-	0.10				
Amount of phosphorus in C ₃ /C ₆ Zn DTP (secondary) (wt%)										0.10					
Calcium C ₁₄ /C ₁₆ /C ₁₈ salicylate (wt%)	3.5	3.5	3.5	3.5	3.5	3.5	2.0	2.0	1.5	3.5					
Magnesium C ₁₄ /C ₁₆ /C ₁₈ salicylate (wt%)							1.0	1.5							
Calcium - sulfonate (wt%)															
Succinimide containing boron (wt%)	5	5	5	5	5	5	5	5	5	5	2.0				
Amount of boron (wt%)	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016				
Coefficient of friction	Right after preparation														
	After heating at 150°C for 72 hours														
	0.093	0.095	0.096	0.096	0.094	0.099	0.094	0.096	0.097	0.12	0.095				
	0.093	0.095	0.096	0.098	0.095	0.100	0.096	0.097	0.097	0.172	0.146				

Note) C₈ - MoDTC: sulfoxymolybdenum - N,N-dioctyl-dithiocarbamate
C₁₈ - MoDTC: sulfoxymolybdenum - N,N-ditridecyl-dithiocarbamate
C₈ - ZnDTP (primary): zinc di-2-ethylhexyldithiophosphate
C₃/C₆ ZnDTP (secondary): zinc isopropyl-1-ethyl-butylidithiophosphate

The lubricating oil compositions of Examples 10 to 18 according to the present invention, into which succinimide containing boron was incorporated, had a coefficient of friction lower than that of any of the lubricating oil compositions of Examples 1 to 9 which contain no succinimide containing boron, and showed excellent friction-reducing properties. Moreover, almost no change was found in the coefficient of friction even after the compositions were heated at 150°C for 72 hours and oxidized. Therefore, it can be seen that the lubricating oil compositions of the present invention are excellent in heat resistance. In contrast, in the case of the lubricating oil composition of Comparative Example 3, which was prepared by using only zinc dialkyldithiophosphate having a secondary alkyl group as the zinc dialkyldithiophosphate, the coefficient of friction determined right after the composition was prepared was already high, even though succinimide containing boron was incorporated into the composition. Moreover, the coefficient of friction became higher after the composition was heated at 150°C for 72 hours and oxidized. It can thus be seen that this comparative composition is poor in both friction-reducing properties and heat resistance. In the case of the lubricating oil composition of Comparative Example 4, which was prepared by using calcium sulfonate instead of alkylsalicylate, the coefficient of friction became higher after the composition was heated at 150°C for 72 hours and oxidized, even though succinimide containing boron was incorporated into the composition. It can thus be known that this comparative composition is poor in heat resistance.

The lubricating oil compositions of the present invention prepared by blending sulfoxymolybdenum dithiocarbamate having a specific structure, zinc dialkyldithiophosphate, alkylsalicylate, and, if desired, succinimide containing boron with a base oil, therefore, have excellent antiwear properties, can maintain friction-reducing properties for a prolonged period of time, and are excellent in both friction-reducing properties and heat resistance. The lubricating oil compositions of the present invention are thus useful as lubricating oils for internal-combustion engines, automatic transmission gearboxes, dampers, power steering units and the like, particularly useful as lubricating oils for internal-combustion engines.

- 16 -

CLAIMS:

1. A lubricating oil composition characterized by comprising a lubricating base oil and additives consisting essentially of:

(a) sulfoxymolybdenum dithiocarbamate containing a hydrocarbon group having 8 to 18 carbon atoms,

(b) zinc dialkyldithiophosphate selected from the group consisting of zinc dialkyldithiophosphate containing a primary alkyl group having 1 to 18 carbon atoms, a mixture of zinc dialkyldithiophosphate containing a primary alkyl group having 1 to 18 carbon atoms and zinc dialkyldithiophosphate containing a secondary alkyl group having 1 to 18 carbon atoms, zinc dialkyldithiophosphates containing a primary alkyl group having 1 to 18 carbon atoms and a secondary alkyl group having 1 to 18 carbon atoms, and mixture thereof,

(c) a mixture of 100 to 50% by weight of calcium alkylsalicylate and 0 to 50% by weight of magnesium alkylsalicylate,

the amount of molybdenum derived from the sulfoxymolybdenum dithiocarbamate being from 200 to 1000 ppm (weight basis) of the total weight of the composition,

the amount of phosphorus derived from the zinc dialkyldithiophosphate being from 0.04 to 0.15% by weight of the total weight of the composition, and

the total amount of the calcium alkylsalicylate and the magnesium alkylsalicylate being from 0.5 to 10% by weight of the total weight of the composition.

2. A lubricating oil composition characterized by comprising a lubricating base oil and additives consisting essentially of:

(a) sulfoxymolybdenum dithiocarbamate containing a hydrocarbon group having 8 to 18 carbon atoms,

- 17 -

(b) zinc dialkyldithiophosphate selected from the group consisting of zinc dialkyldithiophosphate containing a primary alkyl group having 1 to 18 carbon atoms, a mixture of zinc dialkyldithiophosphate containing a primary alkyl group having 1 to 18 carbon atoms and zinc dialkyldithiophosphate containing a secondary alkyl group having 1 to 18 carbon atoms, zinc dialkyldithiophosphate containing a primary alkyl group containing 1 to 18 carbon atoms and a secondary alkyl group containing 1 to 18 carbon atoms, and mixtures thereof,

(c) a mixture of 100 to 50% by weight of calcium alkylsalicylate and 0 to 50% by weight of magnesium alkylsalicylate, and

(d) succinimide containing boron,

the amount of molybdenum derived from the sulfoxymolybdenum dithiocarbamate being from 200 to 1000 ppm (weight basis) of the total weight of the composition,

the amount of phosphorus derived from the zinc dialkyldithiophosphate being from 0.04 to 0.15% by weight of the total weight of the composition,

the total amount of the calcium alkylsalicylate and the magnesium alkylsalicylate being from 0.5 to 10% by weight of the total weight of the compositions,

the amount of boron derived from the succinimide containing boron being from 0.05 to 0.06% by weight of the total weight of the composition, and the boron/nitrogen ratio regarding the number of atoms containing in the succinimide containing boron is from 0.05 to 1.5.

3. The lubricating oil composition of claim 1 or 2 wherein the lubricating base oil is a hydrocracked oil and/or a wax isomerized oil containing 3% by weight or less aromatics, a sulfur content of 50 ppm or less and a nitrogen content of 50 ppm or less.

- 18 -

4. The lubricating oil composition of claim 1 or 2 wherein the primary or secondary alkyl group of the zinc dialkyldithiophosphate contain 3 to 12 carbon atoms.

5. The lubricating oil composition of claim 1 or 2 having a total base number of 3 to 10.

US

23 FEB 1998

Annex US.III, page 2 PCT Applicant's Guide - Volume II - National Chapter - US

06/24/98

Combined Declaration For Patent Application and Power of Attorney (Continued)
(Includes Reference to PCT International Applications)ATTORNEY'S DOCKET NUMBER
JP 6-131165

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS			STATUS (Check One)		
U.S. APPLICATION NUMBER	U.S. FILING DATE		PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.					
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)			

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

Joseph J. Allocca
Registration No. 27,766

Roy J. Ott
Registration No. 24,580 - 2

Send Correspondence to:

Exxon Research and Engineering Company
P.O. Box 390
Florham Park, New Jersey 07932-0390

Direct Telephone Calls to:
(name and telephone number)
Joseph J. Allocca
(201) 765-1446


2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
1	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
2	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
3	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 201 <i>Michiya Yamada</i>	SIGNATURE OF INVENTOR 202 <i>Satoshi Asano</i>	SIGNATURE OF INVENTOR 203 <i>Hirotsuka Tomizawa</i>	SIGNATURE OF INVENTOR 204
DATE <i>January 27, 1998</i>	DATE <i>January 27, 1998</i>	DATE <i>January 27, 1998</i>	DATE

United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division

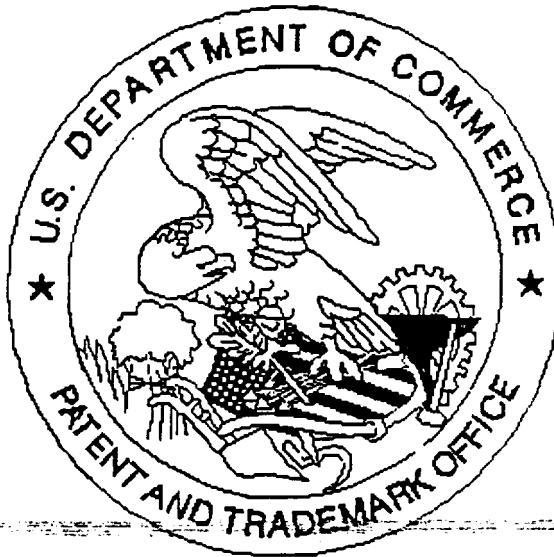

Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.52 because:
 - ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". Pages _____ do not meet these requirements.
 - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
 - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
 - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
 - ☐ Papers contain hand lettering.
2. Drawings are not in compliance and were not scanned because:
 - ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
 - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
 - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3. Page(s) _____ are not of sufficient clarity, contrast and quality for electronic reproduction.
4. Page(s) _____ are missing.
5. OTHER: No Drawings